



DEEP CUT PORTABLE ELECTRIC BAND SAWS

TRIGGER SPEED CONTROL
0-350 SURFACE FT/MIN.
AC ONLY MODELS

6230

LESS CASE

6232-6

INCLUDES STEEL
CARRYING CASE



TWO SPEED
250 AND 350
SURFACE FT/MIN.
AC/DC MODELS

6236

LESS CASE


6238

INCLUDES STEEL
CARRYING CASE



LARGE 4-3/4" X 4-3/4" CAPACITY
ALL MODELS USE STANDARD
44-7/8" X 1/2" X .020" BAND SAW BLADES

- **Powerful Motor With Long Life Brushes & High Output Fans**
Provides high performance for the toughest cutting operations.
- **Optimum Speed Range**
Ideal for cutting pipes, bolts, re-bar, angle iron, tracks and other profiles in a variety of materials. All models include fast cutting, long lasting Super-Tough® Bi-Metal blades.
- **All Ball & Roller Bearing Construction**
For smooth, durable operation, ball bearing mounted armature is dynamically balanced.
- **High Torque Worm Gear & Chain Drive Mechanism**
For optimum motor torque transfer and durability. Self-lubricated for maximum wear resistance.
- **Excellent Balance**
Center of gravity located directly over blade results in straighter cuts while reducing operator fatigue. Front T-handle provides superior control.
- **Open Line Of Sight**
For more accurate cuts.
- **Blade Tightening Lever**
Long life cam provides quick and easy change from one blade to another.

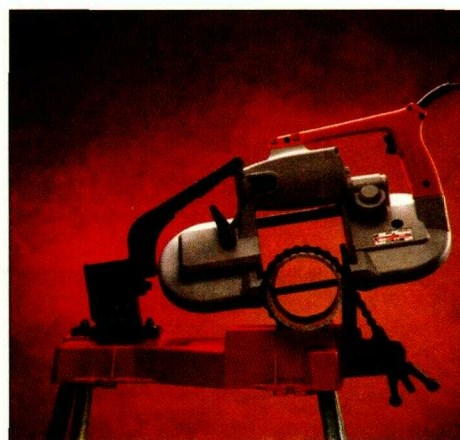

ACCESSORIES

PORTABLE BAND SAW TABLE

48-08-0260

FOR ALL MILWAUKEE BAND SAWS

Converts Milwaukee's portable band saws to stationary units. Can be mounted on a work bench or used on the job with 3/4" diameter pipe for legs (not included). Heavy-duty clamping chain and crank nut easily secures all shapes of material. Net weight 34 lbs.

SPECIFICATIONS

CATALOG NUMBER	NO LOAD SURFACE FT. PER MIN.	VOLTS	AMPS	CAPACITY ROUND STOCK	CAPACITY RECTANGULAR STOCK	LENGTH	NET WGT. LBS.	SHIP. WGT. LBS.
6230 Less Case	0-350	120 AC ONLY	6.0	4-3/4"	4-3/4" x 4-3/4"	19-3/4"	17	21-1/2
6232-6	Same as 6230, but with Steel Carrying Case							27-1/2
6236 Less Case	350/250	120 AC/DC	6.0/5.0	4-3/4"	4-3/4" x 4-3/4"	19-3/4"	17	22
6238	Same as 6236, but with Steel Carrying Case							27-1/2

STANDARD EQUIPMENT: Includes One 14 Tooth Super-Tough® Bi-Metal Blade 48-39-0510.